




1 产品型号及含义 Product Types and Meanings

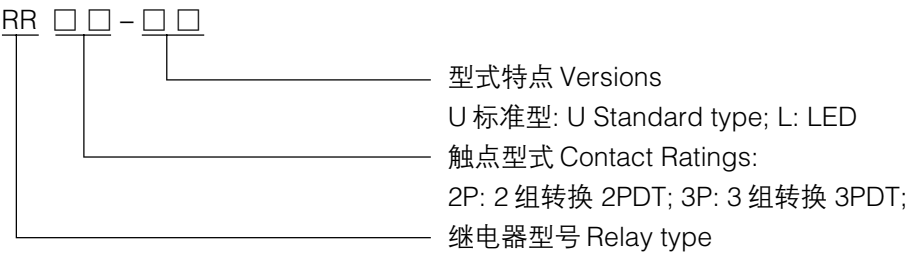


2 性能参数 Specification

型号 Type		RR2P	RR3P
动作电压 Bick-up voltage		$\leq 75\mu s, 75\%$ of rated voltage	
释放电压 Drop-out voltage	AC	$\geq 30\mu s, 30\%$ of rated voltage	
	DC	$\geq 15\mu s, 15\%$ of rated voltage	
最大连续工作电压 Max supply voltage		$110\mu s, 110\%$ of rated voltage	
动作时间 Operating time		25ms	
释放时间 Release time		25ms	
线圈电压 Coil voltage	AC	6~380V	
	DC	6~220V	
线圈额定功率 Nominal coil power		2.0W/3.5VA	
额定绝缘电压 Rated insulation voltage		250V	
接触电阻 Contaet resistance		$< 50m\Omega$ (初始值 Before use)	
绝缘电阻 Contaet resistance		$\geq 500M\Omega$	
介质耐压 Insulation strength		1500VA/1min	
开闭频率 Operation cyele		30cpm	
振动 Vibration		10~50Hz,双振幅 Dual amplitude:1.5mm	
冲击 Shock		10G(正弦半波脉冲:11ms) (Half a wave of pulses of sine:11ms)	

型号 Type	RR2P	RR3P
环境温度 Ambient temperature	-10℃ ~ +55℃	
环境湿度 Humidity	35%~85%RH	
大气压力 Atmospheric	86~106KPa	
机械寿命 Mechanical life	1 × 10 ⁷	
电寿命 Electrical life	1 × 10 ⁵	
触头负载(阻性)Contact capacity	10A/250VA 28VDC	
重量 Net weight	≤ 80g	

3 外形图、接线图、安装孔尺寸 Dimension, Bottom View

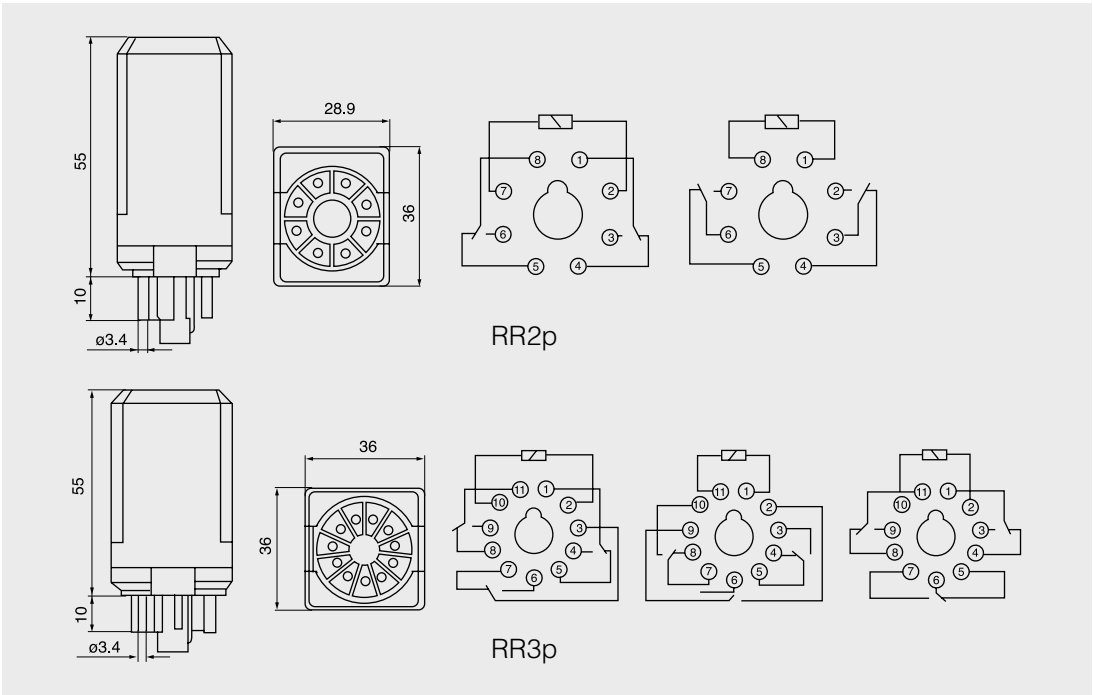

4 性能曲线图 Reference Data

